

70W BRIDGELUX / LITUP LED

STREET MODEL: SFLEDST70LM



#### FEATURES

Our 70W LED street lights are locally assembled and use 1 single 70W Bridgelux / Litup LED as the light source, constant current power supply, wide voltage input (AC85-277V or DC 12-24V), no ultraviolet, infrared, heat and radiation.

Excellent dust and water resistant properties, good self-cleaning design, safety, reliability, low power consumption, long service life.

Modern urban design aesthetics, heat resistance, good sealing performance.

High luminous efficiency, visual fidelity, flicker-free.

Fantastic designed light distribution system.

50,000 hours of continuous use

Installation flexibility.

Structural material, aluminum alloy die-casted, high quality glass lens with good light, dust-proof and waterproof, sealed firmware to enhance security and reliability of the lamp.

Surface treated with an environmentally friendly powder coating process so that light itself has good self-cleaning functionality.

#### APPLICATION SCOPE

City roads, residential areas, industrial areas, sidewalks, parks, schools, villas, estates and other applications where street lighting is required

The lamp uses Bridgelux 140lm/w / Litup 143lm /w COB LED chip as the light source, coupled with high efficiency AC / DC switching power supplies or DC / DC current drive power, efficiency up to 90%, constant current drive power efficiency up to 95%.

ELECTRICAL PARAMETERS

No.	Specs	Unit	Value
1	Input Voltage	V	AC85-277 / 12 / 24
2	Frequency	HZ	47-63
3	Power rating	W	70
4	Power factor		>0.95
5	Power efficiency	%	90

LIGHT CHARACTERISTICS



No.	Specs	Unit	Value
1	LED lighting efficiency	lm/W	120.00
2	Lamp luminance	lm	8000
3	Mid Illumination	lux	Height=8m: 19.31lux
		lux	Height=10m: 12.36lux
4	Color Temperature	K	2700-7000K
5	Color Rendering Index	RA	70 / 80
6	Light Distribution		Asymmetric (Bat Wing) / Rectangular Beam
7	Light efficiency	%	91
8	LED quantity	PCS	1

OTHER PERFORMANCE INDICATORS

No.	Specs	Unit	Value
1	Working Temperature	°C	-30°C~ 55°C
2	Working Humidity	%	10-90
3	Storage Temperature	°C	-10°C~85°C
4	Life (theoretical data)	Hrs	>50,000Hrs
5	Protection class	IP	65
6	Product size	500*210*50	LxWxHmm
7	Packing Size	520*240*120mm	LxWxHmm
8	Net Weight	3	KG

Meridional plane with light curve


Conical surface light intensity distribution

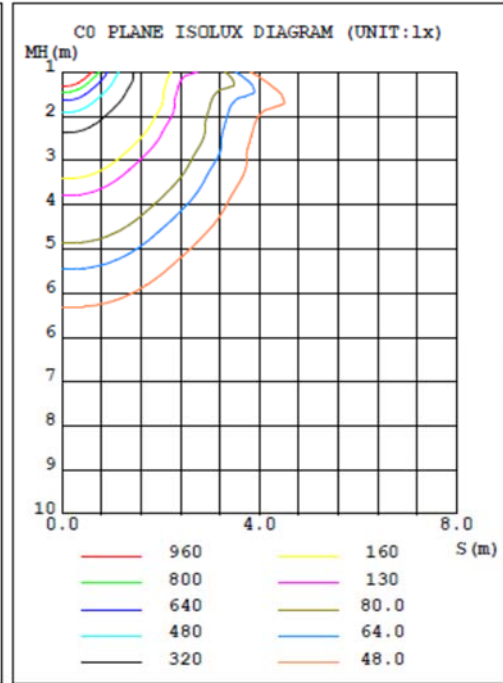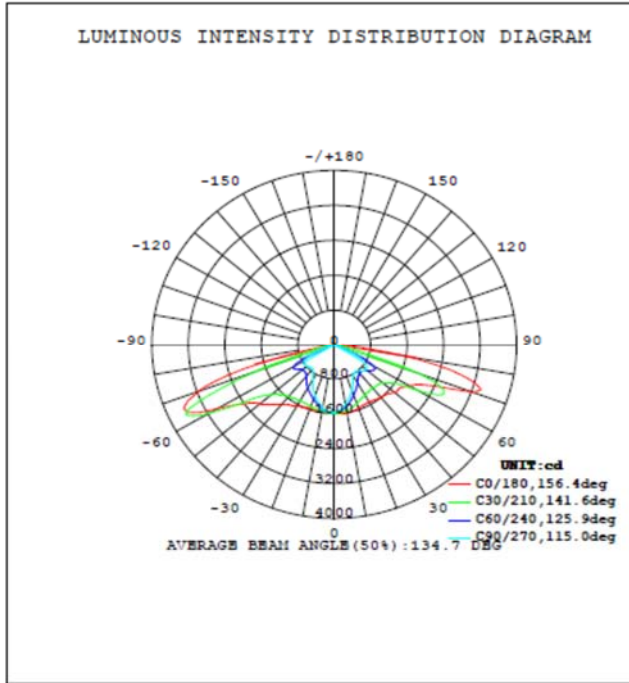

**Illuminance at a Distance**

Height (m)	Center Beam LUX	Beam Width	
		V	H
2m	308.92 LUX	7.3m	1.2m
4m	77.23 LUX	14.5m	2.3m
6m	34.32 LUX	21.8m	3.5m
8m	19.31 LUX	29.0m	4.6m
10m	12.36 LUX	36.3m	5.8m
12m	8.58 LUX	43.5m	7.0m

Vert. Spread: 122.3      Horiz Spread: 32.3

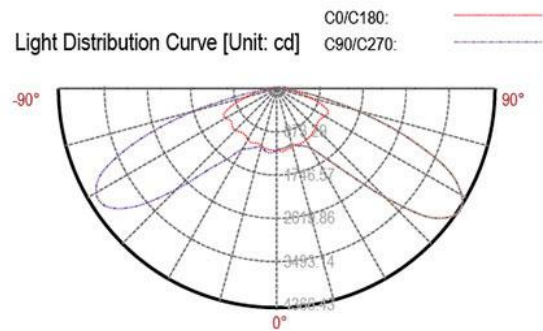

SPIGOT SIZE

60MM

This product is suitable for industrial AC power supply network, using the ambient temperature range is -30 °C ~ 55 °C.

Installation of cable at the first street light take a length of 15-18 meters of cable wire (the actual length of the street lights installed may vary), cable specification: 3 \* 1 m (squared), black sleeving, diameter 8mm, cable outlet connection required (wiring labelled).

TRANSPORT AND STORAGE REQUIREMENTS

Lights in paper bag (internal plus foam)

Lights should be stored in a cool, dry, clean environment, the storage temperature is -10 °C

WARRANTY

LED Driver 3 years

LED Chip 5 Years

IEC 60598-2-3 Certified

Bridgelux LED 140LM / W

Lit LED 143 LM / W